

# **kwik-ZIP<sup>®</sup>**

## **GT Series**

The GT Series is available in 4 different bow heights:

- **GT 10 - 0.39" Bow Height**
- **GT 20 - 0.78" Bow Height**
- **GT 30 - 1.18" Bow Height**
- **GT 40 - 1.57" Bow Height**


The GT Series will fit bar and pipe diameters from 0.70" OD to 2.56" OD.

Centralizing and spacing applications Include, but are not limited to:

- **Rock bolts**
- **Soil nails**
- **Anchors**
- **Small diameter drop pipe**
- **Down hole cameras and other data collection devices.**

No special tools are required to install these products that are manufactured from a high grade engineering thermoplastic called Acetal POM.

Each GT Series carton contains 100 units.

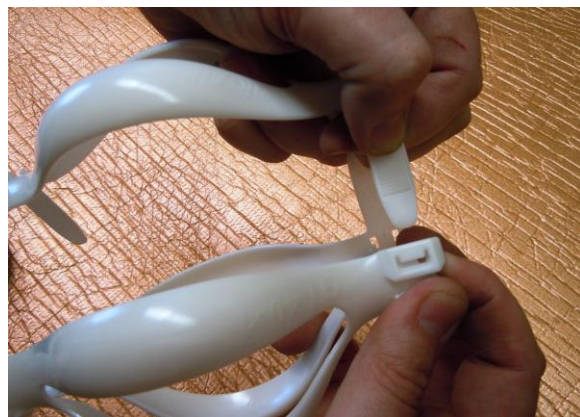

For 2.28" OD and greater pipe diameters see **kwik-ZIP's** 155 Series.

For 4.3" OD and greater pipe diameters see **kwik-ZIP's** HD Series.

***sales@kwikzip.com / www.kwikzip.com***



## kwik-ZIP® GT Series

# UNITS REQUIRED PER CENTRALIZER  
FOR VARIOUS BAR DIAMETERS

Approx Bar / Pipe Dia (mm)	Units per Centralizer
18mm - 29mm (0.70 inch - 1.14 inch)	2
29mm - 46mm (1.14 inch - 1.81 inch)	3
46mm - 65mm (1.81 inch - 2.56 inch)	4
Over 65mm (Over 2.56 inch)	Use 155 HT Series

Important: Check pre-assembled  
centralizer against bar diameter  
before tightening collar straps.