

CASING INSULATOR SPECIFICATION

PART# : SI8-2-3248-RL-3-V

BAND

8" WIDE
14 GA. (.074") HOT ROLLED PICKLED STEEL
FUSION BONDED COATING 8-15 MIL THICK
RIBBED FLANGES

LINER

PVC LINER (0.096")
HARDNESS - DUROMETER "A" 85-90
OPERATING TEMP: 140 F
DIELECTRIC STRENGTH - 60,000 V

RUNNER

2" WIDE X 1 1/2" HIGH MOLDED POLYMER
2 TOP

RISERS

10 GA. (.134) HOT ROLLED PICKLED STEEL
MIG WELDED TO BAND
RISER 'A' = 4.25" TALL
RISER 'B' = 4.9375" TALL

ASSEMBLY HARDWARE

3 SETS PER FLANGE
5/16" -18 X 2" PLATED STEEL BOLTS
5/16" PLATED STEEL WASHERS
5/16" PLATED STEEL NUTS

ROLLERS

LARGE LP ROLLER
3.125 OAH
3750 # CAPACITY EACH
MIG WELDED TO RISER

CASING SPACER
PLACEMENT
SHOULD BE EVERY
6-8 FT. OR 3
SPACERS PER JOINT
UNLESS WRITTEN
APPROVAL BY APS

THIS DRAWING AND PROPRIETARY
DESIGN IS SOLELY THE PROPERTY
OF ADVANCE PRODUCTS &
SYSTEMS, INC. AND IS SUBMITTED
WITH THE UNDERSTANDING THAT
IT WILL BE KEPT IN STRICT
CONFIDENCE.
COPYRIGHT PROTECTED ©.




*** CONTROLLED COPY ***
PIPE(lbs):XXXXX PIPE TYPE: XX

Advance Products & Systems P.O. Box 60399 Lafayette, LA 70576-0399 Ph: (337) 213-6116 Fax: (337) 213-3860	
Casing Spacer	Drawn by: KL
32" OD X 47.25" ID	Approved by: JEW
	Date : 6/14/17

CUSTOMER APPROVAL

PRINT NAME

SIGNATURE

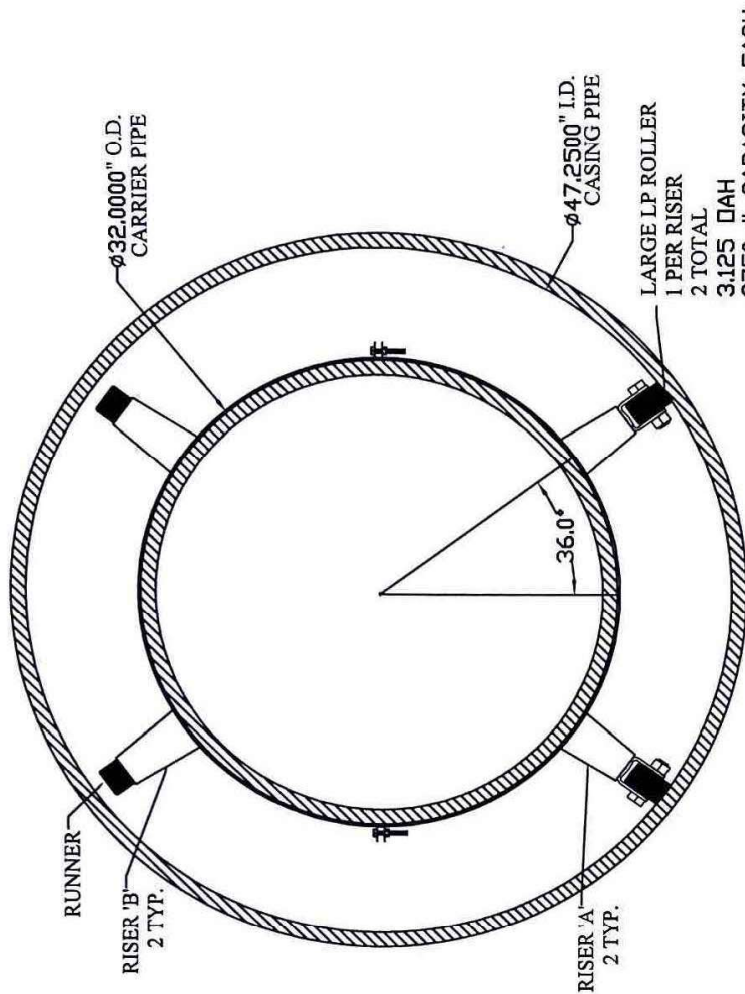

MAX LOAD CAPACITY
PER SPACER: 7,500 LBS
3750 # CAPACITY EACH