

CASING INSULATOR SPECIFICATION

PART# : SI8-M-3248-CR-XV

BAND

8" WIDE
14 GA. (.074") HOT ROLLED PICKLED STEEL
FUSION BONDED COATING 8-15 MIL THICK
RIBBED FLANGES

LINER

PVC LINER
HARDNESS - DUROMETER "A" 85-90
OPERATING TEMP: 140 F
DIELECTRIC STRENGTH - 60,000 VPM

RUNNER

2" WIDE X 1 1/2" HIGH MOLDED POLYMER
2 BOTTOM

2" WIDE X 6" HIGH MOLDED POLYMER-MOD
2 TOP

RISERS

10 GA. (.134) HOT ROLLED PICKLED STEEL
MIG WELDED TO BAND
RISER 'A' = 5.9375 " TALL


ASSEMBLY HARDWARE

3 SETS PER FLANGE
5/16" - 18 X 2" PLATED STEEL BOLTS
5/16" PLATED STEEL WASHERS
5/16" PLATED STEEL NUTS

CUSTOMER APPROVAL

PRINT NAME

SIGNATURE

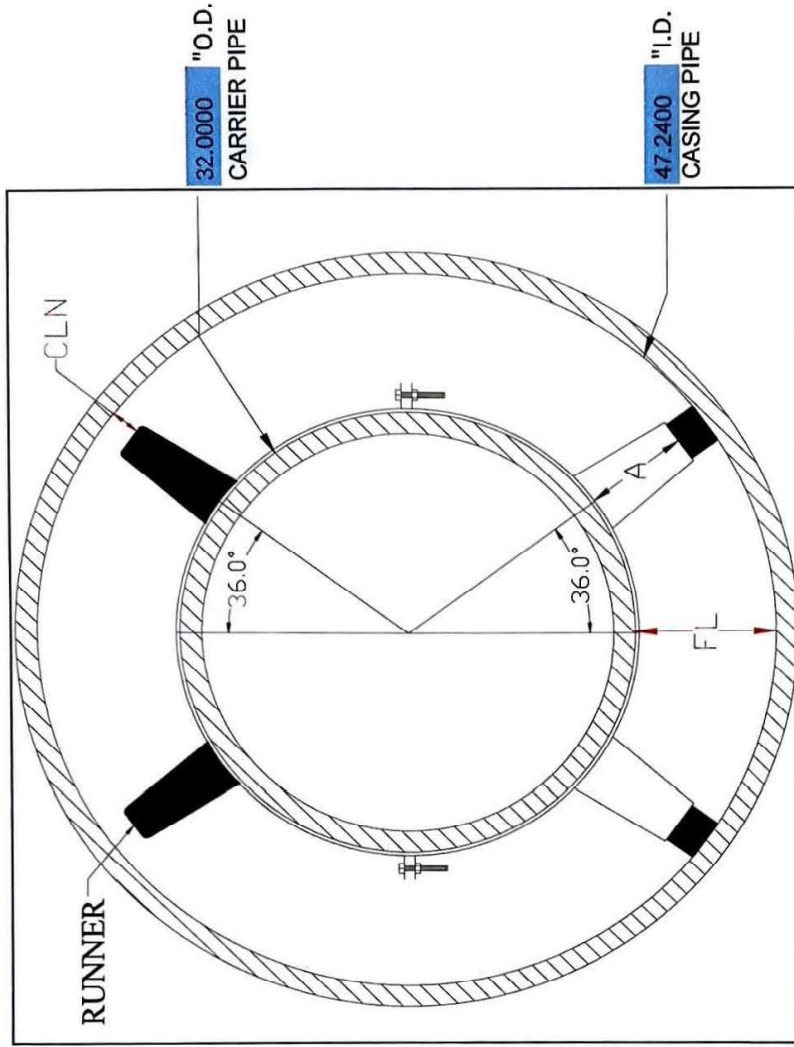

CLN=CLEARANCE= 1.44
FL=FLOW LINE = 7.6

The Flowline is the bottom distance from the OD of the carrier to the ID of the casing.

PIPE(lbs/ft): XX

PIPE TYPE: XX

DRAWING IS NOT TO SCALE

COMMENTS:

THIS DRAWING IS SOLELY THE PROPERTY OF ADVANCE PRODUCTS & SYSTEMS, INC. AND IS SUBMITTED WITH THE UNDERSTANDING THAT IT WILL BE KEPT IN STRICT CONFIDENCE. COPYRIGHT PROTECTED c.



Advance Products & Systems P.O. Box 60399 Lafayette, LA. 70578-0399 Ph.# (337)233-6115 Fax # (337)232-3860			
Casing Spacer	Drawn by:	SALES	
32 X 47.24	Approved by:	JEW	
			4/21/2016