

APOGEEAERO CASING INSULATOR SPECIFICATION

PART# : SI8-142848-CL-1-V

BAND

8" WIDE

14 GA. (.074") HOT ROLLED PICKLED STEEL

FUSION BONDED COATING 8-15 MIL THICK

RIBBED FLANGES

LINER

PVC LINER (0.096")

HARDNESS - DUROMETER "A" 80 +/- 5

OPERATING TEMP: 140 F

DIELECTRIC STRENGTH - 60,000 V

RUNNER

2" WIDE X 1 1/2" HIGH MOLDED POLYMER

2 TOP

RISERS

10 GA. (.134) HOT ROLLED PICKLED STEEL

MIG WELDED TO BAND

RISER 'A' = 1.875" TALL RISER 'C' = 1.00" TALL

RISER 'B' = 1.1875" TALL RISER 'D' = 1.3125" TALL

SUPPORT PLATE RISER 'E' = 13.3125" TALL

10 GA. (.134) HOT ROLLED PICKLED STEEL

MIG WELDED TO BAND

SUPPORT PLATE #1 = 7.625" LONG

SUPPORT PLATE #2 = 3.375" LONG

SUPPORT PLATE #3 = 2.125" LONG

SUPPORT PLATE #4 = 6.25" LONG

SUPPORT PLATE #5 = 2.0625" LONG

SUPPORT PLATE #6 = 0.9375" LONG

ASSEMBLY HARDWARE

3 SETS PER FLANGE

1/4" - 20 X 2" PLATED STEEL BOLTS

1/4" PLATED STEEL WASHERS

1/4" PLATED STEEL NUTS

ROLLERS

XL LP ROLLER

3.50 OAH


6000 # CAPACITY EACH

MIG WELDED TO RISER

CUSTOMER APPROVAL

PRINT NAME

SIGNATURE

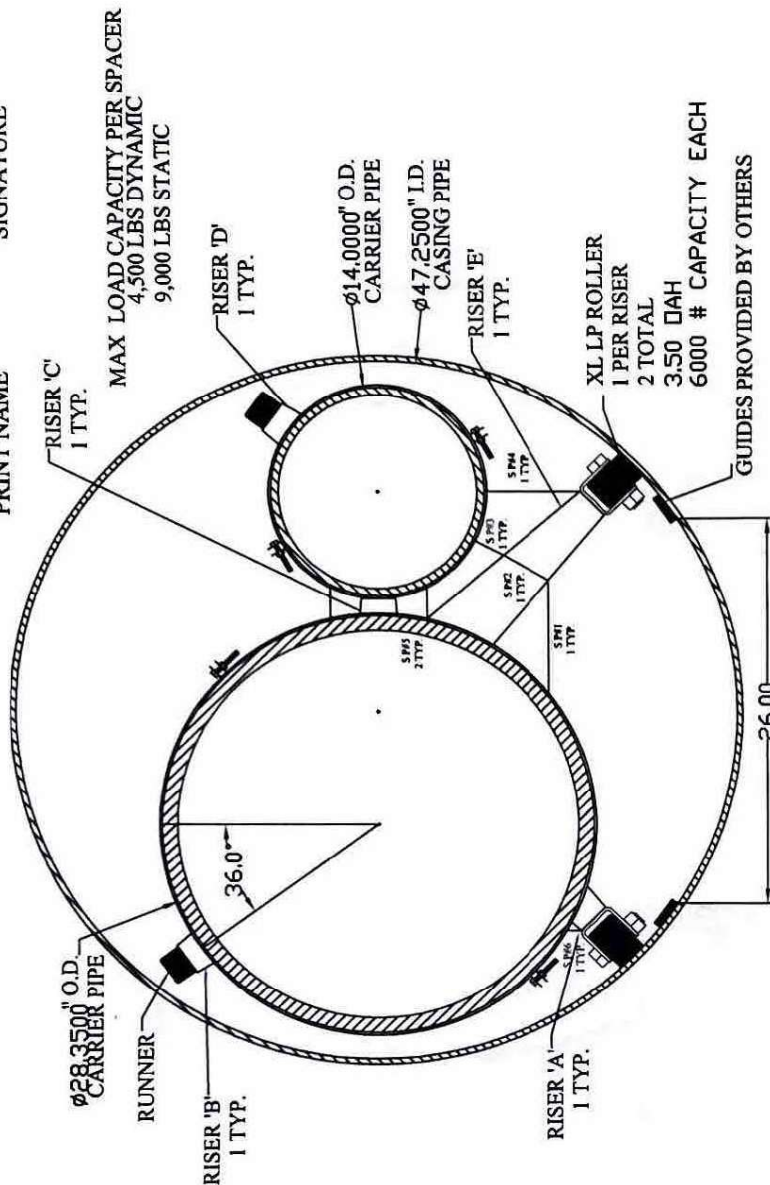

* ONE DIRECTIONAL CASING SPACERS. INSTALL WITH
ARROW POINTING IN DIRECTION OF PUSH / PULL *

5/16" -18 X 2" PLATED STEEL BOLTS

5/16" PLATED STEEL WASHERS

5/16" PLATED STEEL NUTS

*** CONTROLLED COPY ***

PIPE(lbs):XXXXX PIPE TYPE: XX



Advance

Products & Systems

P.O. Box 60399

Lafayette, La. 70578-0399

Ph.# (337)232-6116 Fax# (337)232-3860

Casing Spacer

Drawn by: KL

Approved by: JEW

Date: 4/29/19

14" OD X 28.35" OD X 47.25" ID

THIS DRAWING AND PROPRIETARY
DESIGN IS SOLELY THE PROPERTY
OF ADVANCE PRODUCTS &
SYSTEMS, INC. AND IS SUBMITTED
WITH THE UNDERSTANDING THAT
IT WILL BE KEPT IN STRICT
CONFIDENCE.
COPYRIGHT PROTECTED ©.

CASING SPACER
PLACEMENT SHOULD BE
EVERY 6-8 FT. OR 3
SPACERS PER JOINT
UNLESS WRITTEN
APPROVAL BY APS